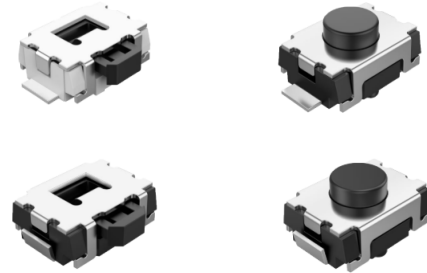


### ▶ Product Features

- Multiple options of force
- Support post
- Mini type
- RoHS Compliant



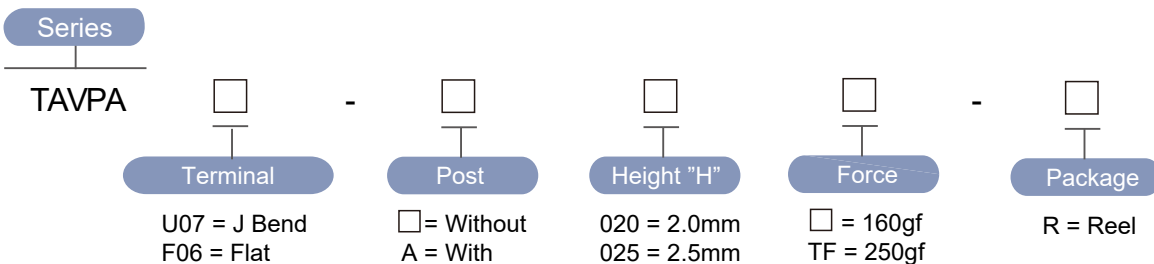
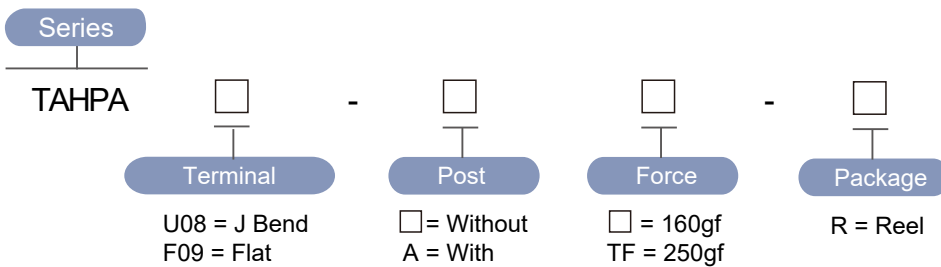
### ▶ Materials

Part Name	Base	Cover	Stem	Contact	Terminal
Material	LCP	SUS	LCP	SUS Ag plated	Phosphor Bronze Ag plated

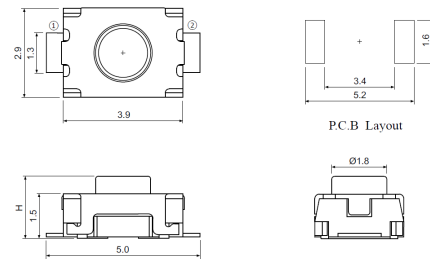

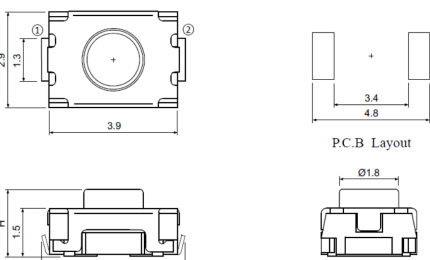

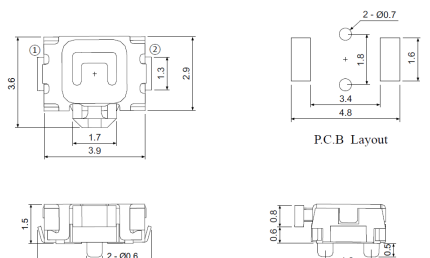

### ▶ Specification

Operating Force	160 / 250gf
Actuator Travel	Vertical : 0.13 ±0.1mm, Horizontal : 0.20 ±0.1mm
Operating Temperature Range	-20°C ~ 70°C
Storage Temperature Range	-40°C ~ 85°C
Voltage Rating	50mA, 12VDC
Actuation Life Cycle	100,000 times
Insulation Resistance	100 MΩ min @ 100VDC
Dielectric Strength	250VAC for 1 minute
Contact Resistance	100mΩ max

### ▶ Part Number



► Diagram

NO.	Dimensions	Circuit
TAVPAF06		
TAVPAU07		
TAHPAU08-A		
TAHPAF09-A	