


### ▶ Product Features

- Multiple options of positions
- Multiple options of housing color
- Gold plated at contact area
- RoHS Compliant



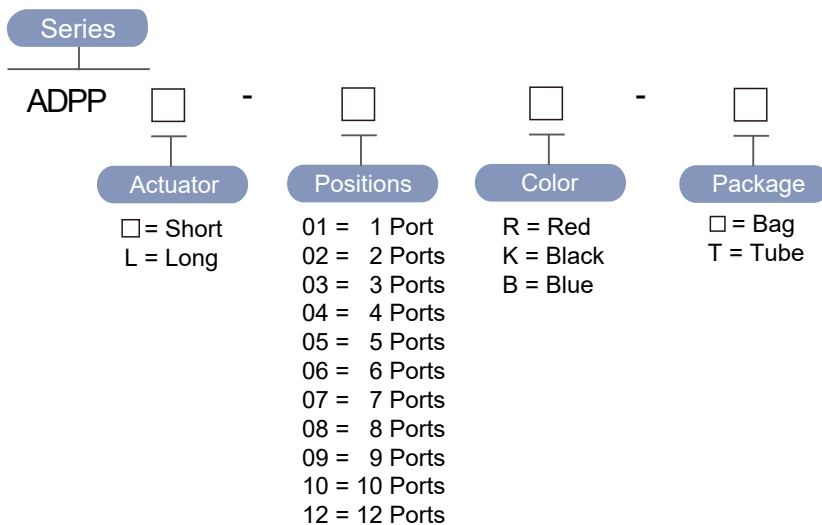
### ▶ Materials

Part Name	Base	Cover	Stem	Terminal
Material	PBT	PBT	PBT	Copper alloy Au plated

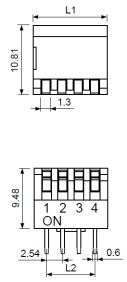
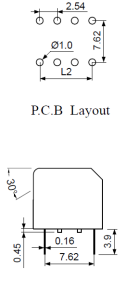

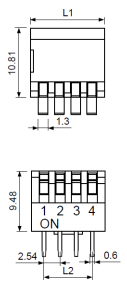
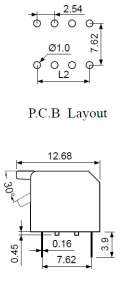

### ▶ Specification

Operating Force	1.000gf Max
Operating Temperature Range	-20°C ~ 70°C
Storage Temperature Range	-40°C ~ 85°C
Voltage Rating	25mA, 24VDC (Switching)
	100mA, 50VDC (Non-Switching)
Actuation Life Cycle	2,500 times
Insulation Resistance	100 MΩ min @ 500VDC
Dielectric Strength	500VAC for 1 minute
Contact Resistance	50mΩ max

### ▶ Part Number



### ► Diagram

NO.	Dimensions	Circuit																																				
ADPP	<table border="1" style="margin-bottom: 10px;"> <thead> <tr> <th>Position</th> <th>L1</th> <th>L2</th> </tr> </thead> <tbody> <tr><td>1</td><td>4.06</td><td>-</td></tr> <tr><td>2</td><td>6.60</td><td>2.54</td></tr> <tr><td>3</td><td>9.14</td><td>5.08</td></tr> <tr><td>4</td><td>11.68</td><td>7.62</td></tr> <tr><td>5</td><td>14.22</td><td>10.16</td></tr> <tr><td>6</td><td>16.76</td><td>12.70</td></tr> <tr><td>7</td><td>19.30</td><td>15.24</td></tr> <tr><td>8</td><td>21.84</td><td>17.78</td></tr> <tr><td>9</td><td>24.38</td><td>20.32</td></tr> <tr><td>10</td><td>26.92</td><td>22.86</td></tr> <tr><td>12</td><td>32.00</td><td>27.94</td></tr> </tbody> </table>  	Position	L1	L2	1	4.06	-	2	6.60	2.54	3	9.14	5.08	4	11.68	7.62	5	14.22	10.16	6	16.76	12.70	7	19.30	15.24	8	21.84	17.78	9	24.38	20.32	10	26.92	22.86	12	32.00	27.94	
Position	L1	L2																																				
1	4.06	-																																				
2	6.60	2.54																																				
3	9.14	5.08																																				
4	11.68	7.62																																				
5	14.22	10.16																																				
6	16.76	12.70																																				
7	19.30	15.24																																				
8	21.84	17.78																																				
9	24.38	20.32																																				
10	26.92	22.86																																				
12	32.00	27.94																																				
ADPPL	<table border="1" style="margin-bottom: 10px;"> <thead> <tr> <th>Position</th> <th>L1</th> <th>L2</th> </tr> </thead> <tbody> <tr><td>1</td><td>4.06</td><td>-</td></tr> <tr><td>2</td><td>6.60</td><td>2.54</td></tr> <tr><td>3</td><td>9.14</td><td>5.08</td></tr> <tr><td>4</td><td>11.68</td><td>7.62</td></tr> <tr><td>5</td><td>14.22</td><td>10.16</td></tr> <tr><td>6</td><td>16.76</td><td>12.70</td></tr> <tr><td>7</td><td>19.30</td><td>15.24</td></tr> <tr><td>8</td><td>21.84</td><td>17.78</td></tr> <tr><td>9</td><td>24.38</td><td>20.32</td></tr> <tr><td>10</td><td>26.92</td><td>22.86</td></tr> <tr><td>12</td><td>32.00</td><td>27.94</td></tr> </tbody> </table>  	Position	L1	L2	1	4.06	-	2	6.60	2.54	3	9.14	5.08	4	11.68	7.62	5	14.22	10.16	6	16.76	12.70	7	19.30	15.24	8	21.84	17.78	9	24.38	20.32	10	26.92	22.86	12	32.00	27.94	
Position	L1	L2																																				
1	4.06	-																																				
2	6.60	2.54																																				
3	9.14	5.08																																				
4	11.68	7.62																																				
5	14.22	10.16																																				
6	16.76	12.70																																				
7	19.30	15.24																																				
8	21.84	17.78																																				
9	24.38	20.32																																				
10	26.92	22.86																																				
12	32.00	27.94																																				