

► Product Features

- Multiple options of positions
- 1.27 Pitch
- Gold plated at contact area
- RoHS Compliant




► Materials

Part Name	Base	Cover	Stem	Terminal
Material	FR52	FR52	LCP	Brass Au plated


► Specification

Operating Force	500gf Max
Operating Temperature Range	-40°C ~ 85°C
Storage Temperature Range	-40°C ~ 85°C
Voltage Rating	25mA, 24VDC (Switching)
	100mA, 50VDC (Non-Switching)
Actuation Life Cycle	1,000 times
Insulation Resistance	100 MΩ min @ 500VDC
Dielectric Strength	250VAC for 1 minute
Contact Resistance	100mΩ max

► Part Number

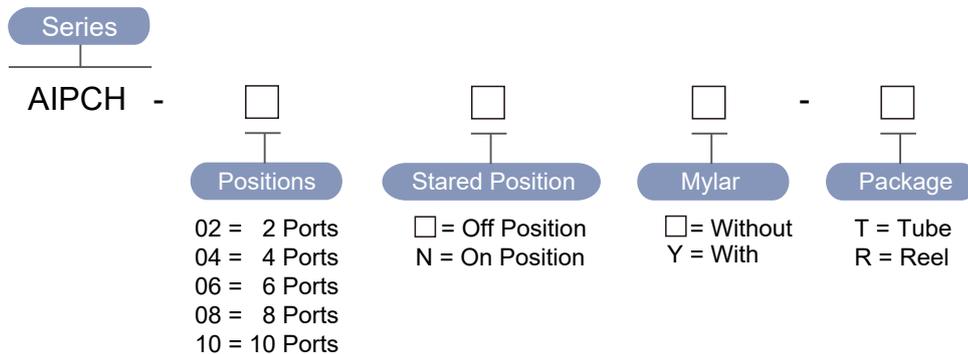

► Diagram

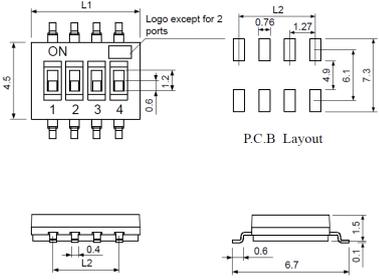NO.	Dimensions	Circuit																		
AIPCH	<table border="1" data-bbox="561 616 699 712"> <thead> <tr> <th>Position</th> <th>L1</th> <th>L2</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>3.77</td> <td>1.27</td> </tr> <tr> <td>4</td> <td>6.31</td> <td>3.81</td> </tr> <tr> <td>6</td> <td>8.85</td> <td>6.35</td> </tr> <tr> <td>8</td> <td>11.39</td> <td>8.89</td> </tr> <tr> <td>10</td> <td>13.93</td> <td>11.43</td> </tr> </tbody> </table> 	Position	L1	L2	2	3.77	1.27	4	6.31	3.81	6	8.85	6.35	8	11.39	8.89	10	13.93	11.43	
Position	L1	L2																		
2	3.77	1.27																		
4	6.31	3.81																		
6	8.85	6.35																		
8	11.39	8.89																		
10	13.93	11.43																		