

▶ Product Features

- 2P2T models
- Tiny type
- RoHS Compliant




▶ Materials

Part Name	Base	Cover	Stem	Contact	Terminal
Material	LCP	SUS	PA46	Beryllium copper Ag plated	Phosphor Bronze Ag plated

▶ Specification

Operating Force	170gf ±100
Operating Temperature Range	-10°C ~ 60°C
Storage Temperature Range	-25°C ~ 85°C
Voltage Rating	100mA, 12VDC
Travel	1.5mm
Actuation Life Cycle	8,000 times
Insulation Resistance	100 MΩ min @ 100VDC
Dielectric Strength	250VAC for 1 minute
Contact Resistance	100mΩ max

▶ Part Number

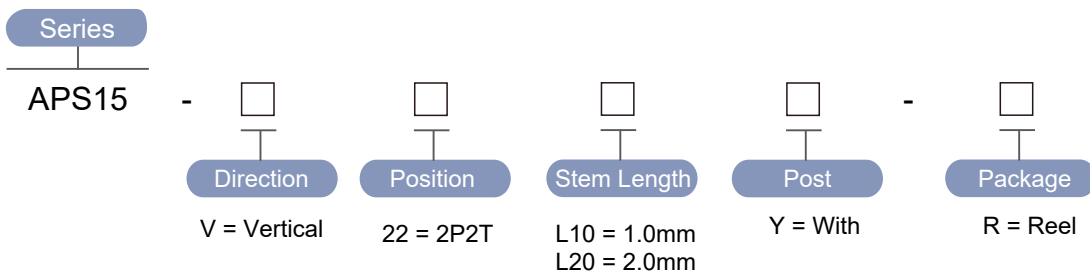

► Diagram

NO.	Dimensions	Circuit
<p>APS15-V22LxxY</p>	<p>P.C.B Layout</p>	