

► **Product Features**

- Multiple options of stems & force
- Multiple color of stem
- RoHS Compliant




► **Materials**

Part Name	Base	Cover	Stem	Contact	Terminal
Material	PA6T	Brass CuSn plated	PA6T	Phosphor Bronze Ag plated	Brass Ag plated

► **Specification**

Operating Force	90, 160, 250, 329gf
Actuator Travel	0.25 ±0.1mm
Operating Temperature Range	-20°C ~ 70°C
Storage Temperature Range	-40°C ~ 85°C
Voltage Rating	50mA, 12VDC
Actuation Life Cycle	90/160gf : 200,000 / 250/320gf : 100,000 times
Insulation Resistance	100 MΩ min @ 100VDC
Dielectric Strength	250VAC for 1 minute
Contact Resistance	100mΩ max

► **Part Number**

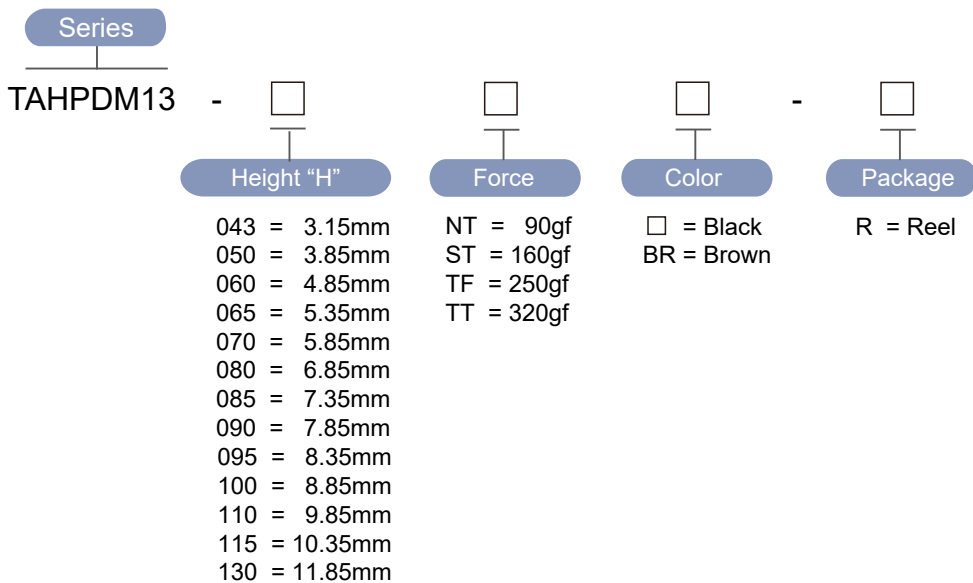

► Diagram

NO.	Dimensions	Circuit
TAHPDM13	<p>PCB Layout</p>	