


▶ Product Features

- Thin type
- RoHS Compliant




▶ Materials

| Part Name | Base | Contact | Terminal |
|-----------|------|------------------|------------------------------|
| Material | PA6T | SUS Ag plated | Phosphor Bronze Ag plated |

▶ Specification

| | |
|-----------------------------|------------------------------|
| Operating Force | 160, 250gf |
| Actuator Travel | 0.15 ±0.1mm |
| Operating Temperature Range | -20°C ~ 70°C |
| Storage Temperature Range | -40°C ~ 85°C |
| Voltage Rating | 50mA, 12VDC |
| Actuation Life Cycle | 160gf / 250gf : 100,000 time |
| Insulation Resistance | 100MΩ min @ 100VDC |
| Dielectric Strength | 100VAC for 1 minute |
| Contact Resistance | 1Ω max |

▶ Part Number

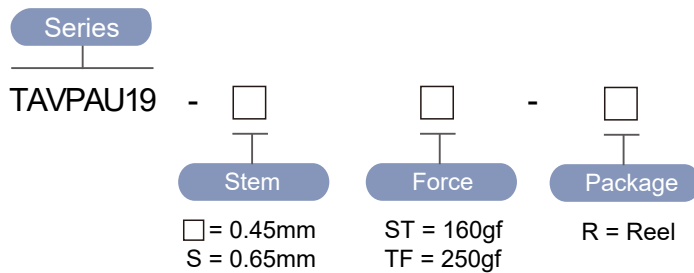

► Diagram

| NO. | Dimensions | Circuit |
|------------|------------|---------|
| TAVPAU19-S | | |
| TAVPAU19 | | |