


► **Product Features**

- Thin type
- RoHS Compliant




► **Materials**

Part Name	Base	Contact	Terminal
Material	LCP	SUS Ag plated	Phosphor Bronze Ag plated

► **Specification**

Operating Force	160, 250gf
Actuator Travel	0.15 ±0.1mm
Operating Temperature Range	-20°C ~ 70°C
Storage Temperature Range	-40°C ~ 85°C
Voltage Rating	20mA, 15VDC
Actuation Life Cycle	160/250gf : 100,000 time
Insulation Resistance	100MΩ min @ 100VDC
Dielectric Strength	100VAC for 1 minute
Contact Resistance	1Ω max

► **Part Number**

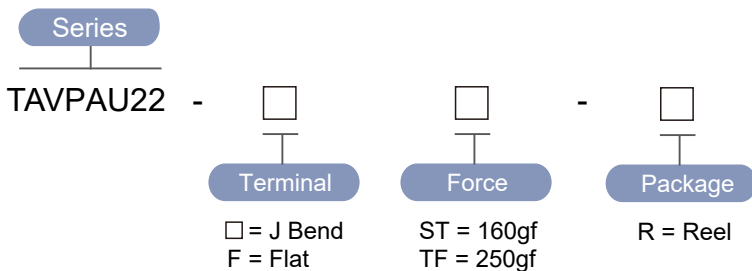

► Diagram

NO.	Dimensions	Circuit
TAVPAU22		
TAVPAU22-F		