

### ► Product Features

- Multiple options of force
- Thin type
- RoHS Compliant



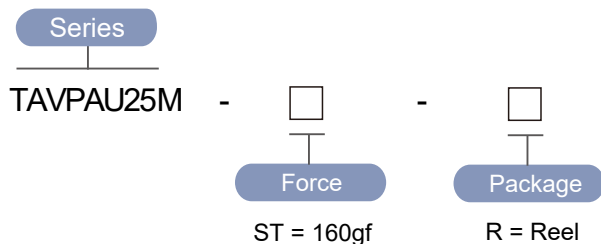
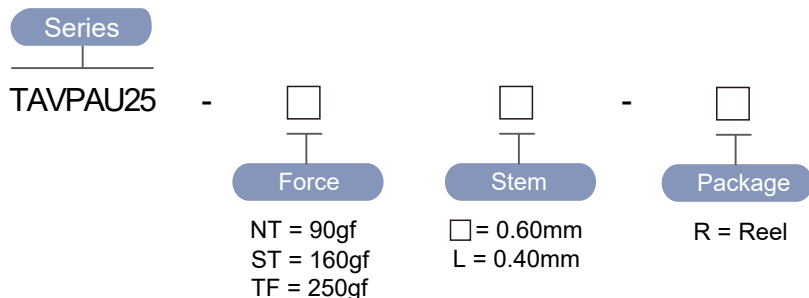
### ► Materials

Part Name	Base	Contact	Terminal
Material	PA6T / PA9T	SUS Ag plated	Phosphor Bronze Ag plated

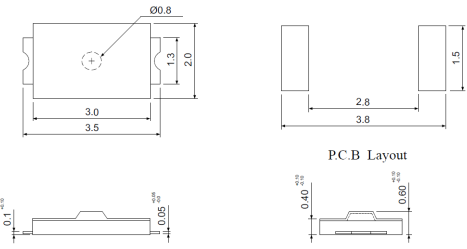

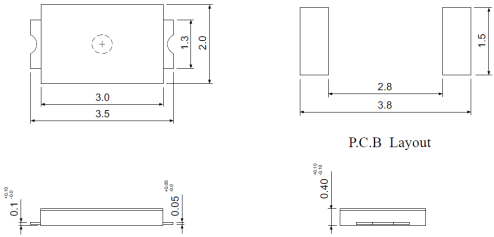

### ► Specification

Operating Force	90, 160, 250gf
Actuator Travel	0.13 ±0.05mm
Operating Temperature Range	-20°C ~ 70°C
Storage Temperature Range	-40°C ~ 85°C
Voltage Rating	20mA, 15VDC
Actuation Life Cycle	100,000 time ; 25M : 500,000 times
Insulation Resistance	100MΩ min @ 100VDC
Dielectric Strength	100VAC for 1 minute
Contact Resistance	500mΩ max

### ► Part Number



► Diagram

NO.	Dimensions	Circuit
TAVPAU25		
TAVPAU25-xxL		
TAVPAU25M	