


▶ Product Features

- Multiple options of stems & force
- Multiple terminal length
- RoHS Compliant



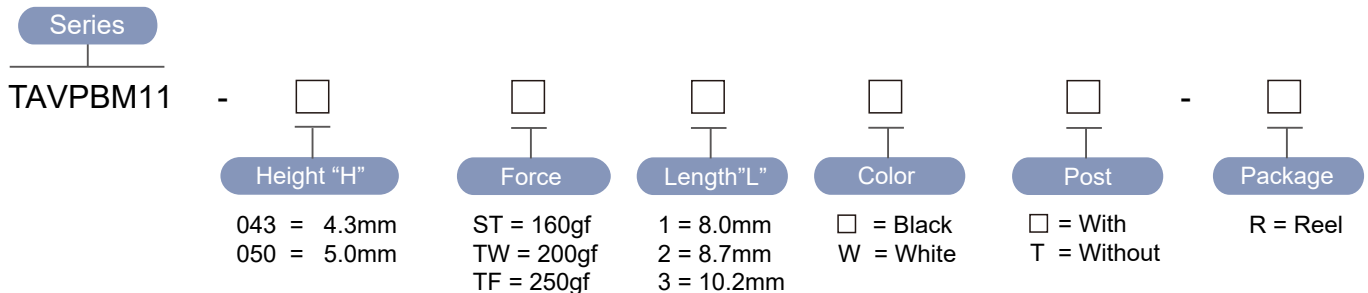
▶ Materials

Part Name	Base	Cover	Stem	Contact	Terminal
Material	PA6T	Iron	PA6T	SUS Ag plated	Brass Ag plated

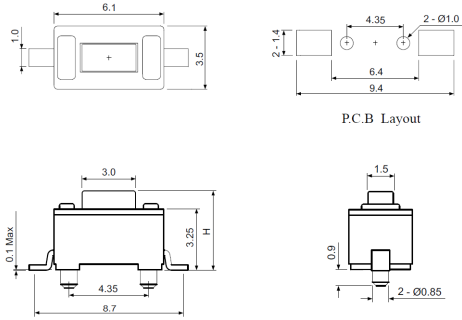

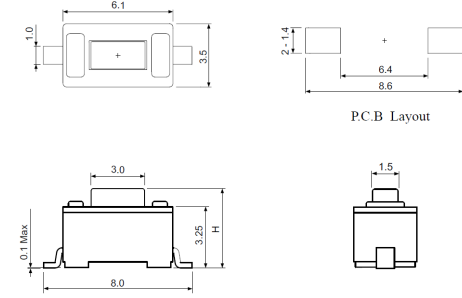

▶ Specification

Operating Force	160, 200, 250gf
Actuator Travel	0.25 ±0.1mm
Operating Temperature Range	-20°C ~ 70°C
Storage Temperature Range	-40°C ~ 85°C
Voltage Rating	50mA, 12VDC
Actuation Life Cycle	160gf : 50,000 times ; 200 / 250gf : 30,000 times
Insulation Resistance	100 MΩ min @ 500VDC
Dielectric Strength	250VAC for 1 minute
Contact Resistance	100mΩ max

▶ Part Number



► Diagram

NO.	Dimensions	Circuit
TAVPBM11-xxxxx2x		
TAVPBM11-xxxxx1xT		
TAVPBM11-xxxxx3xT	