


### ▶ Product Features

- Multiple options of force / terminal
- Multiple options of stem color
- Compact size
- RoHS Compliant



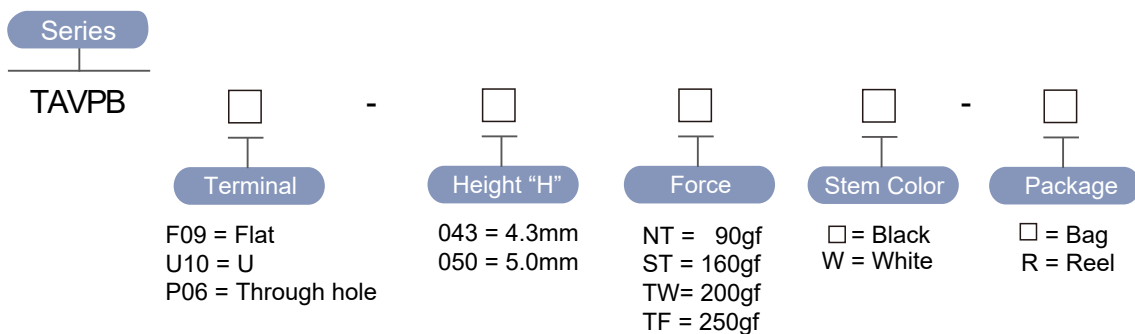
### ▶ Materials

Part Name	Base	Cover	Stem	Contact	Terminal
Material	PA6T	Iron	PA6T	SUS Ag plated	Brass Ag plated

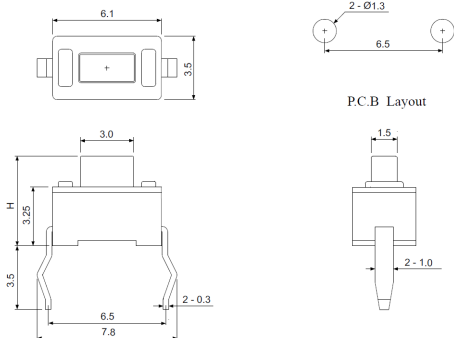

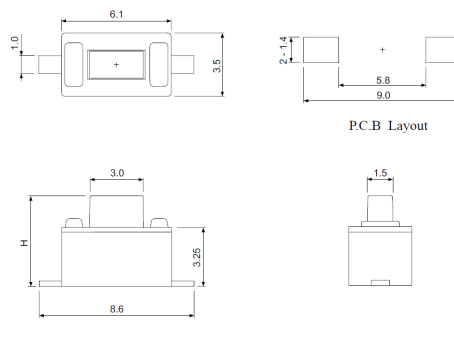

### ▶ Specification

Operating Force	90, 160, 200, 250gf
Actuator Travel	0.25 ±0.1mm
Operating Temperature Range	-20°C ~ 70°C
Storage Temperature Range	-40°C ~ 85°C
Voltage Rating	50mA, 12VDC
Actuation Life Cycle	50,000 times ( 90/160gf ) ; 30,000 times ( 200/250gf )
Insulation Resistance	100 MΩ min @ 500VDC
Dielectric Strength	250VAC for 1 minute
Contact Resistance	100mΩ max

### ▶ Part Number



► Diagram

NO.	Dimensions	Circuit
TAVPBP06		
TAVPBF09		
TAVPBU10	