

▶ Product Features

- Available for Lock and Non-lock
- Long Travel
- RoHS Compliant




▶ Materials

Part Name	Base	Cover	Stem	Contact	Terminal
Material	PBT	POM	POM	Phosphor bronze Ag plated	Brass Ag plated

▶ Specification

Operating Force	200gf
Actuator Travel	2.3mm
Operating Temperature Range	-10°C ~ 60°C
Storage Temperature Range	-20°C ~ 75°C
Voltage Rating	100mA, 30VDC
Actuation Life Cycle	10,000 times
Insulation Resistance	100 MΩ min @ 100VDC
Dielectric Strength	250VAC for 1 minute
Contact Resistance	100mΩ max

▶ Part Number

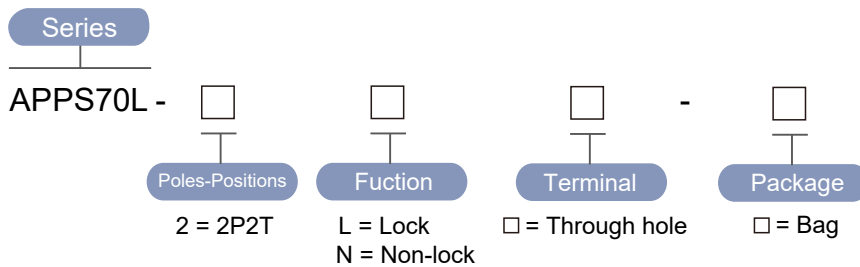

► Diagram

NO.	Dimensions	Circuit
<p>APPS70L-2x</p>		