


▶ Product Features

- 2P3T models
- RoHS Compliant




▶ Materials

Part Name	Base	Cover	Stem	Contact	Terminal
Material	LCP	SUS	PA46	Beryllium Copper Ag plated	Phosphor Bronze Ag plated

▶ Specification

Operating Force	230gf
Operating Temperature Range	-10°C ~ 60°C
Storage Temperature Range	-20°C ~ 70°C
Voltage Rating	100mA, 12VDC
Actuation Life Cycle	10,000 times
Insulation Resistance	100 MΩ min @ 100VDC
Dielectric Strength	250VAC for 1 minute
Contact Resistance	100m Ω max

▶ Part Number

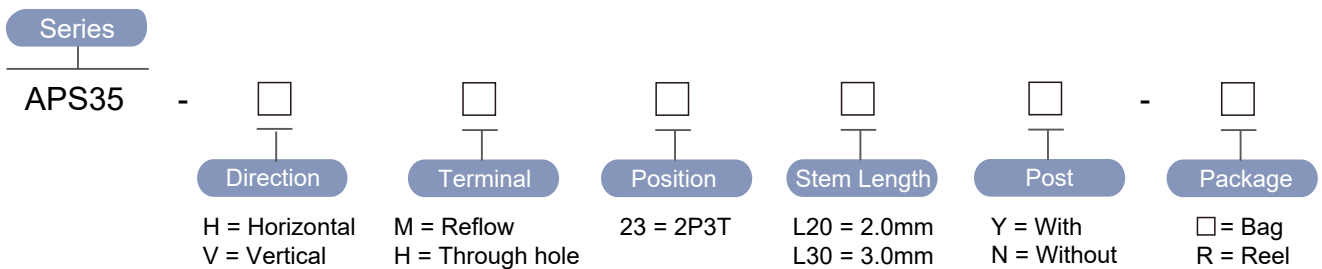

► Diagram

NO.	Dimensions	Circuit
<p>APS35-VM23LxxN</p>		
<p>APS35-VH23LxxN</p>		
<p>APS35-HM23LxxN</p>		
<p>APS35-HH23LxxN</p>		